



GAS-TO-LIQUIDS

CUTTING AND SLICING OILS
FROM ECO-FRIENDLY NATURAL GAS




www.oelfrei.com


● conventional hydrocrack oil ● greenCNC Gas-to-Liquids Oil




LOW EVAPORATION

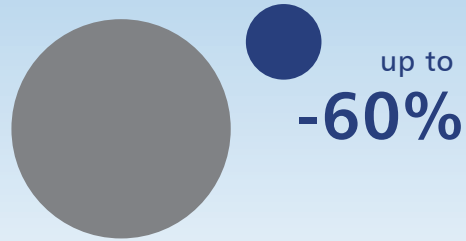

HIGH FLASH POINT

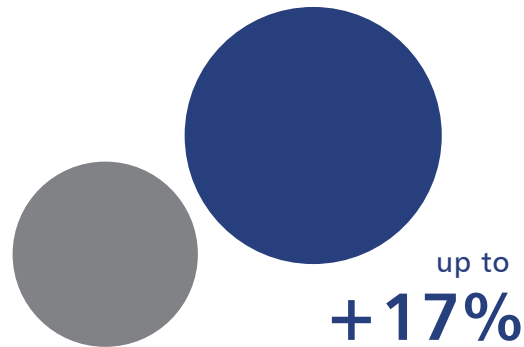

LESS WEAR

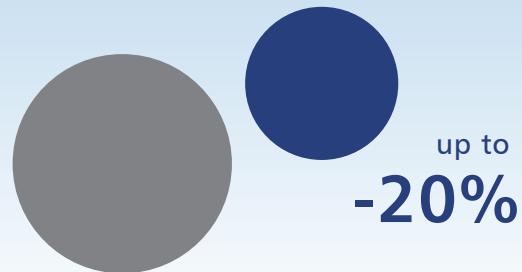

KIND TO THE SKIN
ENVIRONMENTALLY FRIENDLY
GOOD AIR CLEANING CAPACITY
NO FOAM WHILE PROCESSING
HIGH OXIDATION STABILITY
NO BAD SMELL
NO FOG IN THE HALL
HIGH FLASH POINT

greenCNC[®]
Metalworking

Excerpt from the greenCNC Gas-to-Liquids product range:


greenCNC GTL CUT 5 for non-ferrous metal, aluminum and glass processing

greenCNC GTL CUT 7 for moderate processing

greenCNC GTL CUT 40 for aggressive cutting

greenCNC GTL GRIND 20 for grinding hard metal


greenCNC GTL GRIND 21 for grinding steel and its alloys

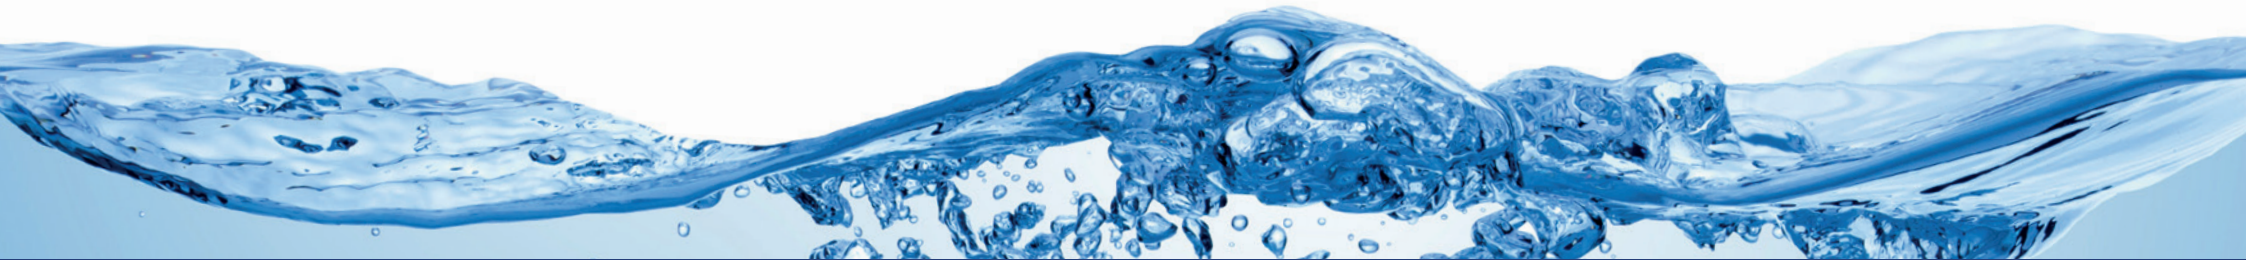


THE QUANTITY MAKES THE POISON!

From 01.06.2015 onwards, all pipelines and machinery, which contain a machining oil with a viscosity <math><21.5 \text{ mm}^2 / \text{sec}</math>, is to be labeled according to GHS as "aspiration-toxic" (R 65 / GHS 08).

Evaporation loss according to Noack at 250 ° C - DIN 51581

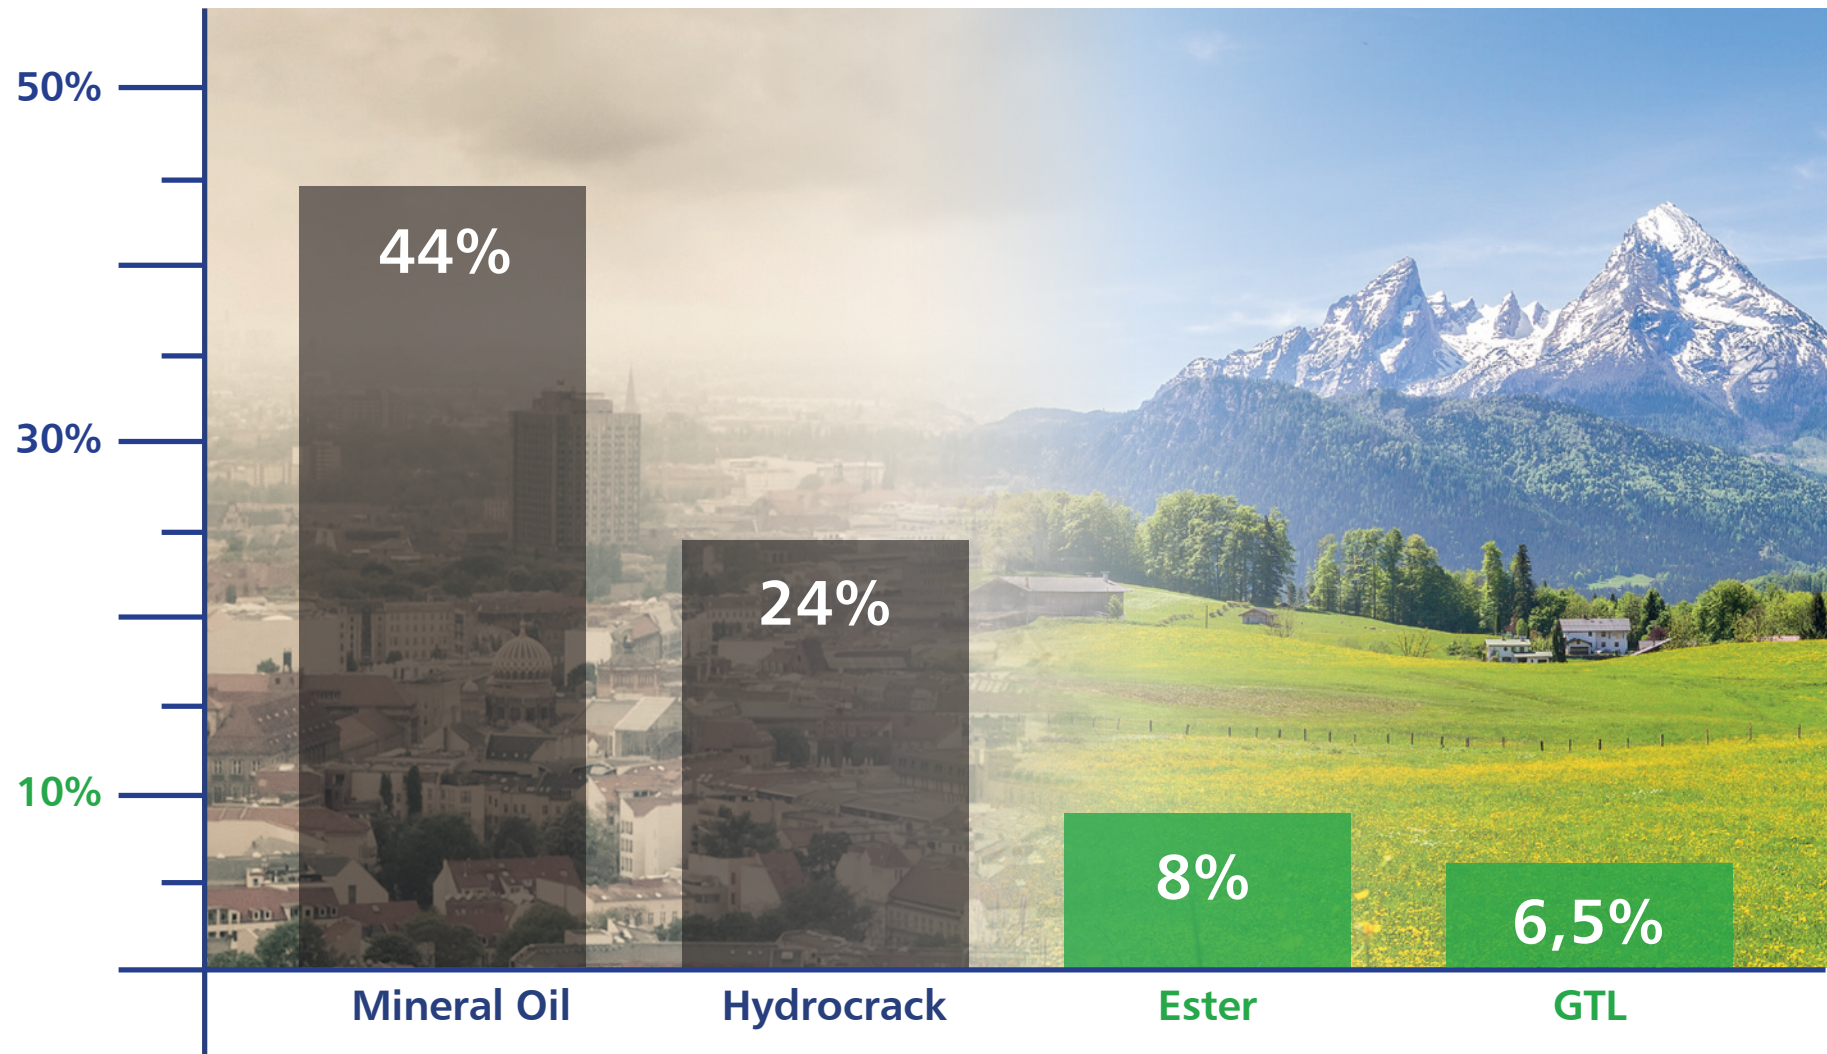

FLASH POINT DIN EN ISO 2592

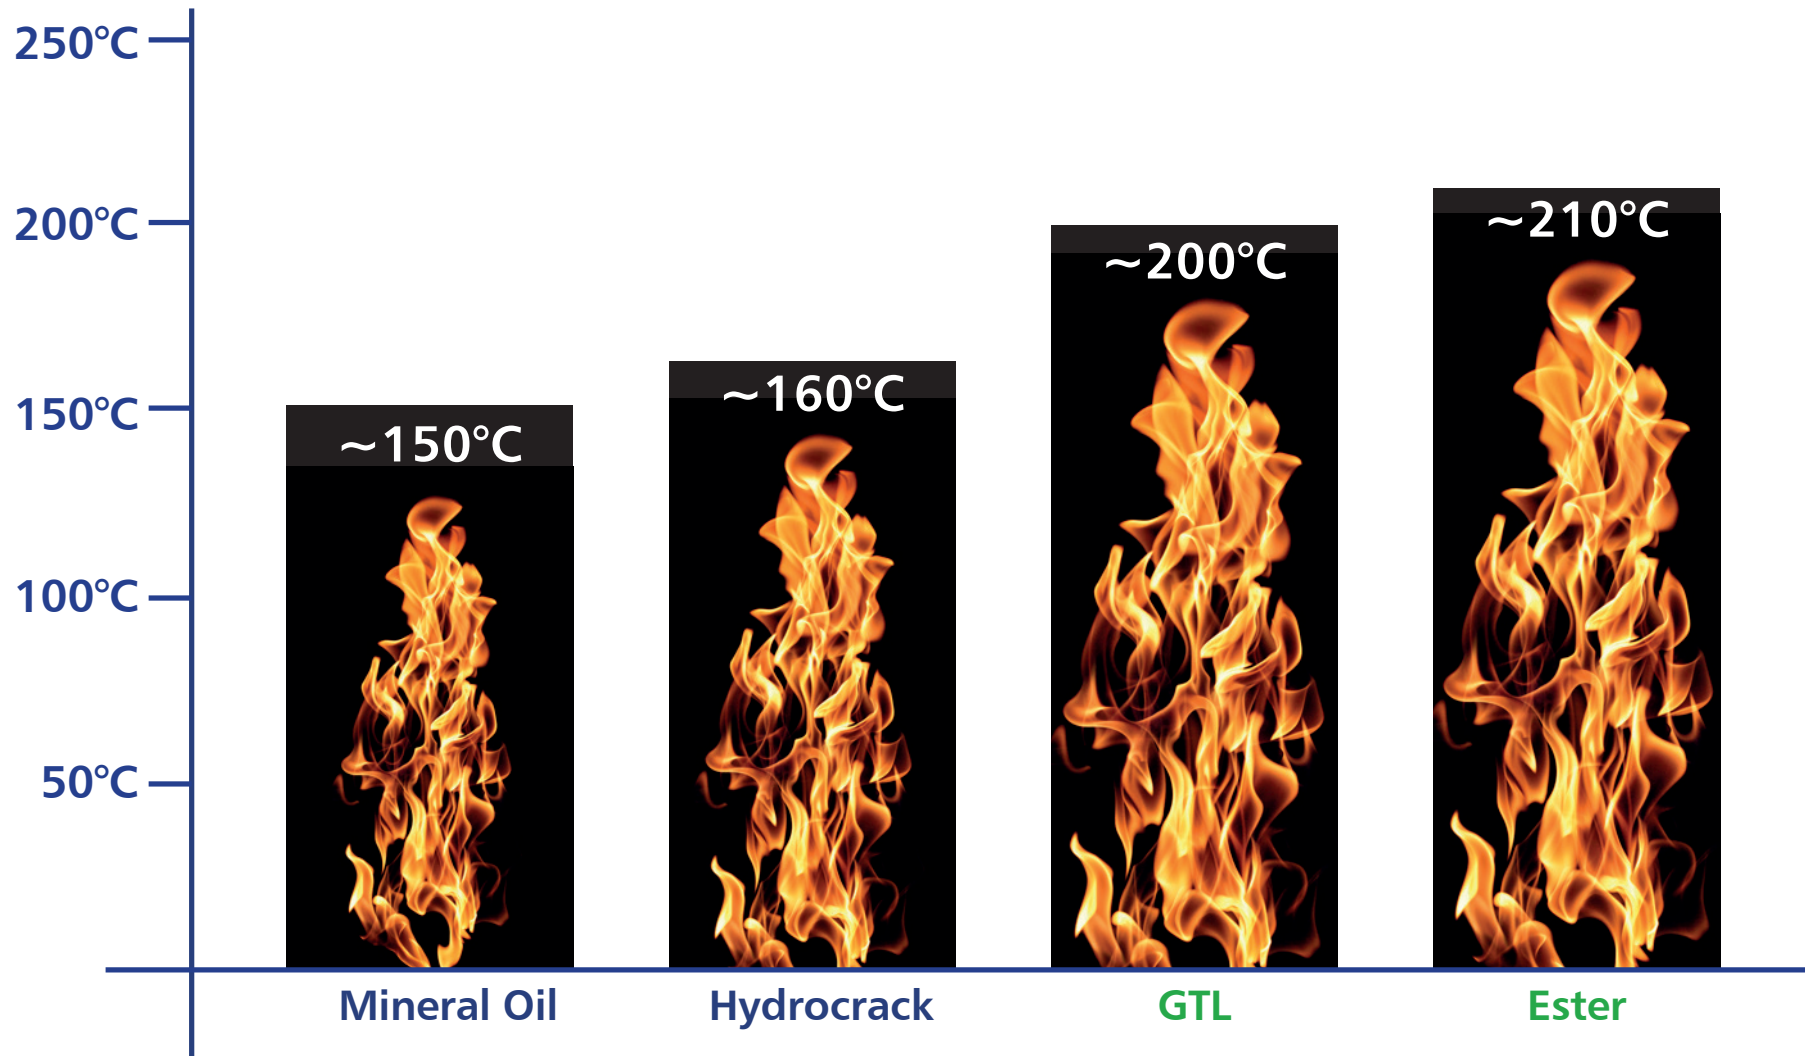



OIL & MINERAL OIL FREE COOLING LUBRICANTS

Future-oriented lubricant technology, employee & environmental protection

Günther Karl GmbH - Administration
Adolf-Kolping-Straße 32
D-84359 Simbach/Inn
Tel. +49 (0) 8571 7970
Fax +49 (0) 8571 602557
info@oelfrei.com



www.oelfrei.com